




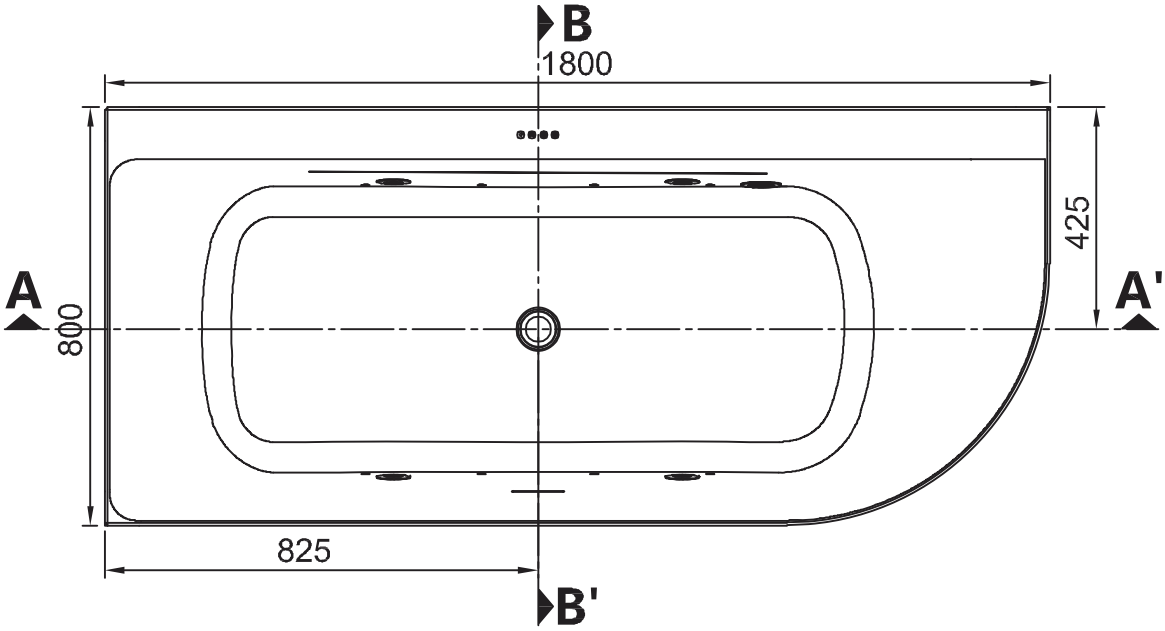

Vista in pianta
plan view

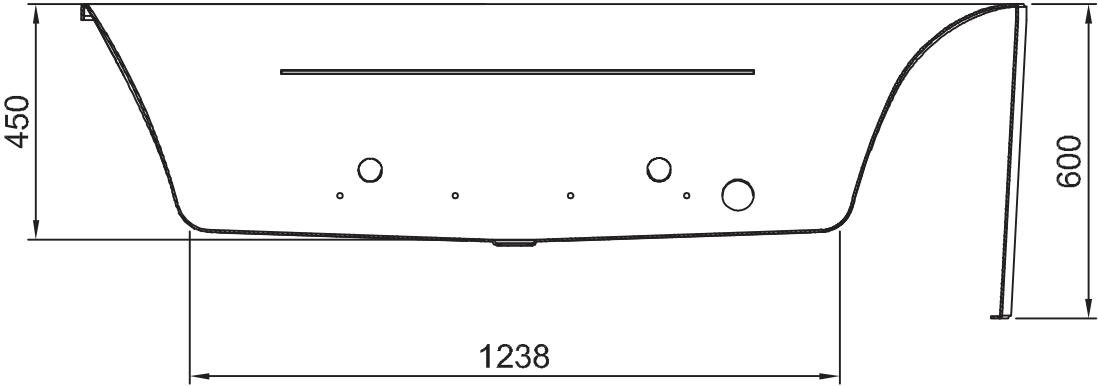


Sezione A/A'
Section A/A'

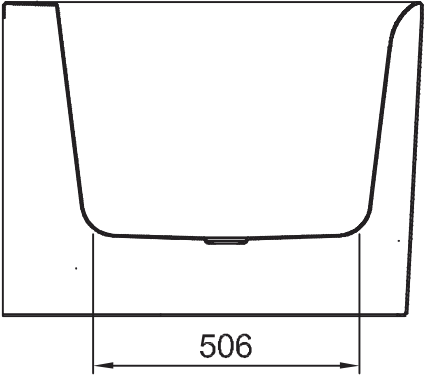

Sezione B/B'
Section B/B'

Colacril

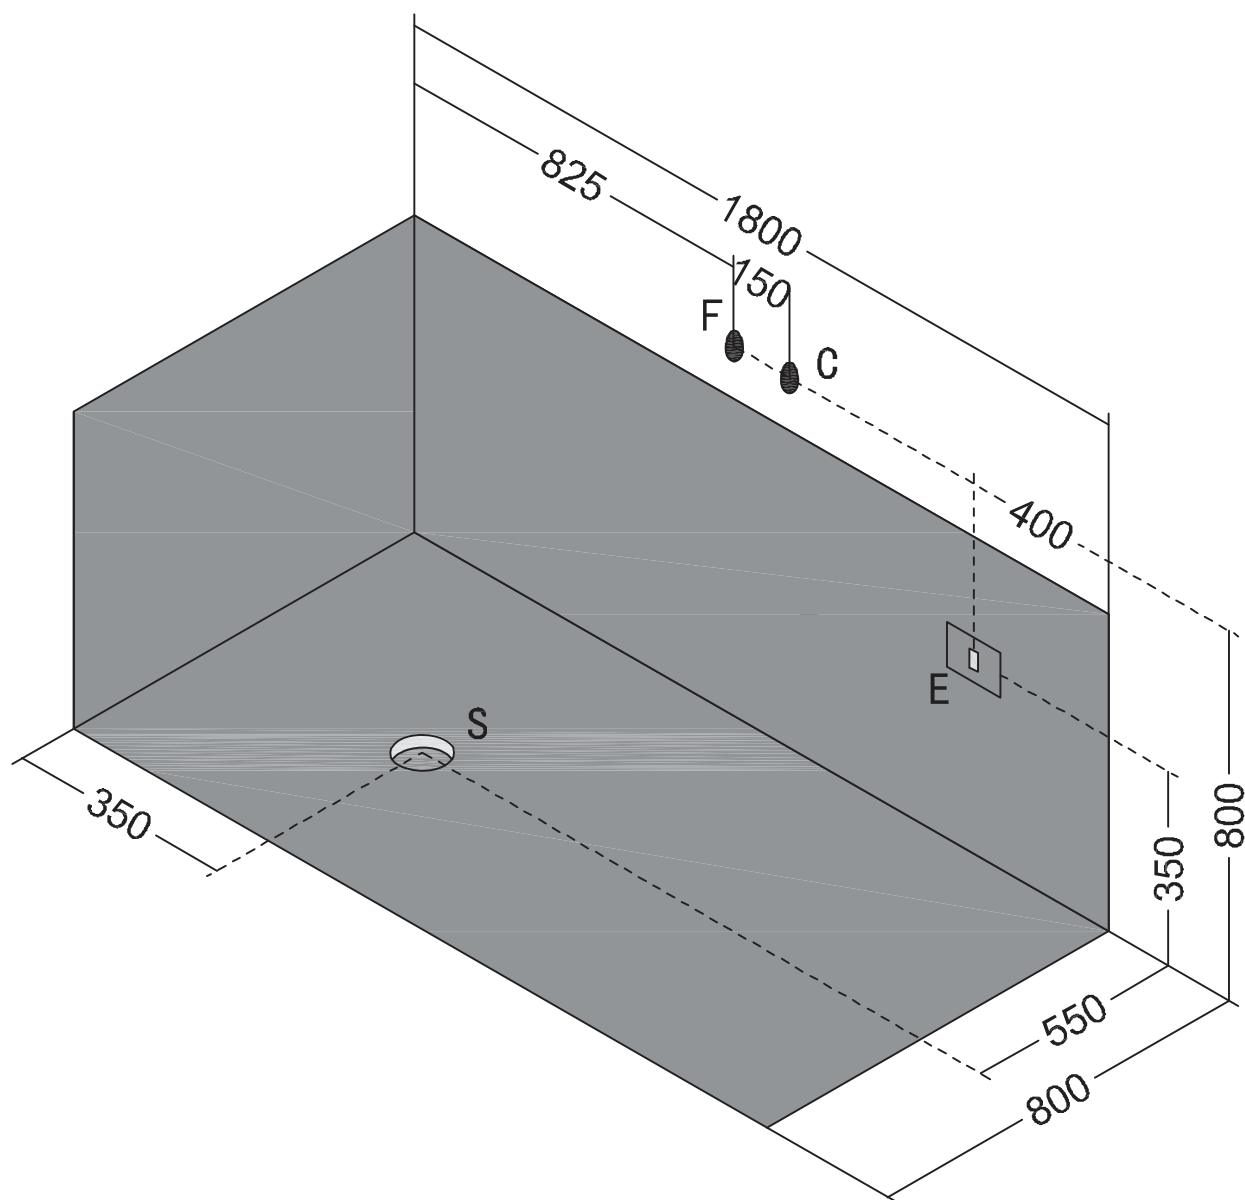

Ingombro vasca proiettato nel muro

Bath overall dimensions as projected on the wall

Colacril

I	CARATTERISTICHE IDRAULICHE	CARATTERISTICHE ELETTRICHE	REQUISITI DI PREINSTALLAZIONE
<i>N.B. L'ISTALLAZIONE DEVE AVVENIRE A PAVIMENTO E PARETI FINITE</i>	Numero jets: 4	V 220/240	C : Allaccio acqua calda rubinetteria parete: 1/2"
		HZ 50/60	F : Allaccio acqua fredda rubinetteria parete: 1/2"
Peso netto: Kg 60		KW 0.78	S : Allaccio scarico incassato a pavimento: 1-1/2"
Peso spedizione: Kg 90		A 5	E : Allaccio elettrico idromassaggio IPX5
Volume spedizione: m3 = 1,385			
Contenuto acqua Lt 257			
GB	WATER SYSTEM SPECIFICATION	POWER SYSTEM SPECIFICATION	CONDITION REQUIRED BEFORE THE INSTALLATION
<i>N.B. THE INSTALLATION MUST BE CARRIED OUT WITH FLOOR AND WALLS ALRESDY TILED</i>	Numero jets: 4	V 220/240	C : Wall taps outlet for hot water: 1/2"
		HZ 50/60	F : Wall taps outlet for cold water: 1/2"
Net weight: Kg 60		KW 0.78	S : Drainage outlet istalled in the floor: 1-1/2"
total weight with package: Kg 90		A 5	E : Power outlet for the wirpool IPX5
Volume with package: m3 = 1,385			
Water capacity Lt 257			
F	WATER SYSTEM SPECIFICATION	POWER SYSTEM SPECIFICATION	CONDITION REQUIRED BEFORE THE INSTALLATION
<i>N.B. THE INSTALLATION MUST BE CARRIED OUT WITH FLOOR AND WALLS ALRESDY TILED</i>	Numero jets: 4	V 220/240	C : Wall taps outlet for hot water: 1/2"
		HZ 50/60	F : Wall taps outlet for cold water: 1/2"
Net weight: Kg 60		KW 0.78	S : Drainage outlet istalled in the floor: 1-1/2"
total weight with package: Kg 90		A 5	E : Power outlet for the wirpool IPX5
Volume with package: m3 = 1,385			
Water capacity Lt 257			